



NASCOM 1 & 2

Invasion Earth (MC/G) (with incredible sound effects)

Our fast MC code SPACE INVADERS now has sound effects which really show what can be achieved with a programmable sound chip. The aliens fire six different missile types – intelligent homing, angled, direct, multiple warhead, exploding and radio-jamming.

Other features are:- choice of 10 speeds and 4 levels of difficulty; replace barriers if desired and advancing attackers as each wave is destroyed. More addictive than 'pot' this game may ruin your life! £10.95

N.B. If you have an earlier version of the game, we will update it for £3 – just return your original cassette.

SPECIAL OFFER – Deduct £5 if you order the Chip, Sound Board, Demo Program & Invasion Earth together.

Jailbreak in Space (16K/MC/G)

In this exciting arcade game(similar to Cosmic Guerrilla) you defend a top security jail, holding 3 alien prisoners, against the onslaught of enemy space ships. They try to dismantle your jail 'brick-by-brick' attacking from both sides. Increasing points are awarded for aliens, brick-carrying & prisoner-freeing aliens respectively. The level of difficulty is extremely high, so do not buy this one unless you are an experienced 'arcadian'. High-score & initials of high-scorer displayed. £8.95

Graphic Golf (16K/B/G)

Excellent use of Nascom graphics enhance this well written golf program. Play the full 18 hole course, but steer clear of the bunkers, trees and spectators. Penalty points are incurred for hitting the ball out of bounds. Random generation of wind speed & direction brings added variety. Select the right club (choice of 9 + driver) and also the direction of your shot and the force of your swing. Once on the green the screen is re-drawn to show the hole, flag and putting distance. Beat the PAR 72 £7.95

AY-3-8910 Programmable Sound Chip

YES – This IS the amazingly powerful “Clang, Bang, Zap, Tweet” sound & music generator, with three channels which can be independently programmed for sound output and amplitude. In addition it has an ‘envelope controlled’ noise generator, ideal for creating explosions and firing sounds. £6.45

Sound Chip Data Manual (60 pages)

This contains a full description of the architecture & operation of the chip, detailed advice on the interfacing to various microprocessors, and comprehensive explanations on the generation of music and sound effects. £2.25 (no vat)

Sound Chip Interfacing Board

The board has been designed to interface between the Parallel Input/Output Port (PIO) of the Nascom and the sound chip. It is supplied ready-built and just plugs straight onto your PIO connector. Nascom 1 connectors available on request. Sound generation is illustrated in machine code & Basic, (chip not included) £13.50

Sound Chip Demo Program (MC)

A brief summary of the main registers is given, together with a description of their functions. Thereafter, two separate modes may be selected. Direct mode allows values to be entered into the chip registers via the keyboard, making experimentation simple, thus leading to a rapid appreciation of the chip's potential. The second mode turns the keyboard into a 7 octave 'piano', displaying the notes being played as well as the values of the registers. £5.95

*** NASCOM 1 – Cottis Blandford cassette interface for N2 format, reliability & fast load £14.90
- 8K RAM required unless otherwise stated
- Please state if Nascom TAPE Basic required.
ALL PROGRAMS SUPPLIED ON CASSETTE IN CUTS/KANSAS CITY FORMAT

Please add 55p/order P & P + VAT @ 15%.
Large (15½p) Sae for FULL CATALOGUE.

PROGRAM POWER
5, Wensley Road
Leeds LS7 2LX.



CONTENTS

Editorial	Page 1
Eprom Programmer / Reader / Checker	Page 2
The Z800	Page 8
Xtal Basic Extra	Page 11
Letters	Page 17
Hands on . . . Part the Third	Page 18
The Magic Hexagon	Page 23
Nas-Sys Monitors	Page 27
Towers of Hanoi	Page 31

EDITORIAL

We must first apologise for the late appearance of this, the December issue of Micropower. New Year's Resolution – we must do better in 1982.

On the basis of the response from readers, and the amount of material we are being sent by contributors, we have decided to produce six issues in 1982 at approximately two-month intervals, the first issue to appear towards the end of February.

The price of Micropower will remain the same – 95p per issue, so a year's subscription will be £5.70. This includes postage and packing, but only for the British Isles. Please 65p per copy for Europe, £1.05 per copy for printed paper air mail to the rest of the world.

As always, we are still looking for contributors. Write about your pet projects, hardware or software – what they do, how they do it, how you would like to develop them in future.

There was a time in 1981 when it looked as though Nascom would disappear without trace. Now, with Lucas at the helm, 1982 should be the year when the Nascom system at last 'takes off' and justifies the faith that its many supporters have had in it.

FOR SALE Two 64K Ram boards
Use 4116 (4 Mhz) with self refresh capability
Telephone Brian, Monday – Thursday evenings,

Interface to Nascom Bus
£65 each.
0475 24904

EPROM PROGRAMMER / CHECKER / READER

by C. Bowden

The equipment described in this article is the third EPROM programmer that the author has built in the last couple of years. The first version, which was built about two years ago, worked via the serial interface and was very slow and unreliable. It took over an hour to 'burn' a 2708.

Version number 2, built about a year ago, worked through the Nascom PIO and was much faster, taking only a couple of minutes for the same task. It was also much more reliable, and the software included routines to copy EPROMS to RAM, and to verify them against RAM. One disadvantage, however, was that it would only program 2708 EPROMS, although the basic hardware was suitable for extension to 2K EPROMS, such as the 2716/2516.

The third version, described in this article will work with 2708, 2516 and 2716 EPROMS, and some of the routines can also be used with mask-programmed ROMS which are pin-compatible with 2716s, such as the ROMS used in the NASCOM 2 for Nas-Sys and Graphics. Two extra routines have been added, and the unit will now carry out the following tasks:-

2708/2516/2716 EPROMs

- 1) Check whether the EPROM is erased, and display a suitable message.
- 2) Program the EPROM from data in RAM, and display a progress count.

2708/2516/2716 EPROMs, and pin compatible ROMS

- 3) Transfer the contents of the chip into RAM at a chosen address.
- 4) Compare the contents of the chip against RAM, and display errors.
- 5) Dump a copy of the chip contents to a printer on the serial port, displaying memory locations and hex and ASCII data.

The program occupies about 2K bytes of memory space. No attempt has been made to reduce this for the following reasons:-

- 1) The program has been written so as to minimise the chance of operator error, by offering single-key choices backed up by verification of entry wherever possible. This requires a large number of messages and prompts, which take up a lot of memory space.
- 2) Because of this, it would have been difficult to keep the size of the program below 1K bytes; 2K seemed to be suitable, as the program would then fit into a 'self-programmed' EPROM.

- 3) The program would not normally reside in memory (unless, as in the author's case, on an EPROM board that can be paged in or out of the system, see INMC80 No. 4). Normally, it would be loaded from disc or tape.

The listing was written using the CP/M Editor 'ED' for assembly by Macro 80, because program development is easier with these more powerful utilities. It should be easy to alter it to suit ZEAP. The main changes required are:-

Leave out the colons after labels;
Remove the assembler directives END, Z80, ASEG, .PHASE and .DEPHASE;
Substitute a suitable memory ORG address;
Substitute " in place of ' in compare instructions.

If you have 'ED' or any other editor with MACRO find/substitute commands it should be very easy to make the changes needed to the Source code. Otherwise, there should be few problems. The PIO ports are defined for the I/O board (using ports 14 and 15). These can be changed in the equates section of the listing.

SOFTWARE OPERATION

The program is written so that the user is reminded, by means of messages on the screen, to take suitable precautions when handling chips. User input is in the form of single key replies to prompts on the screen. All entries are echoed on the screen and the user may change them. The various routines are listed in the form of a 'menu'.

When the program is executed, the title is placed on the left side of the top (unscrolled) line of the screen, and warnings about chip handling appear for a couple of seconds. The program then prompts the operator to press key 'C' when he is ready to continue. Whilst waiting for a response, the program display a message warning the operator to switch off when inserting or removing chips. When key C is pressed a prompt asks for the type of EPROM to be handled – key A should be pressed for 2708s, key B for 2516/2716s.

When this entry has been made, the user is asked to verify it by a 'Y' or 'N' response. If 'N' is entered the program repeats the request for the EPROM type, while on receipt of 'Y' the type selected is displayed on the right hand side of the top line, and remains there until changed. In addition the value stored in the program workspace at the location ROMFLG is set to 04H for 1K EPROMs, or 08H for 2K EPROMs.

The 'Menu' for the five routines is then displayed, together with a list of the keys needed to access the routines. Once a routine has been selected and verified, it is

then immediately accessed as described below. At the end of each routine a suitable message is output, either confirming the completion, or indicating that errors have occurred. This message is held on the screen for approximately 2 seconds, and then the program jumps back to the label 'RESTRT', and the user is asked if he wants to carry on with the same type of chip. A response of 'Y' will take him back to the menu, while 'N' will return him to the key 'C'/warning message routine, followed by chip type selection.

THE ROUTINES

E – CHECK FOR ERASED EPROM

This routine needs no further information from the user and it immediately reads each byte in succession from the chip, checking that its value is 0FFH. If all the bytes are FF, the routine ends with a message saying that the EPROM is erased. If any byte is detected which is not FF, the routine terminates immediately and the message "EPROM" not fully erased" appears. The operation of the routine is very rapid.

The remaining four routines all need a four digit hexadecimal address in order to continue. A subroutine is called when the program enters the chosen routine; this subroutine prompts the operator to enter the required address. It checks the data as it is entered, and only allows valid hexadecimal digits to be stored.

If an error is made during the entry of the four digits, the user must continue until four entries have been made. He will then be given a chance to change the whole entry. On exit from the subroutine, the address will be in the HL register pair, and also in the workspace at label STOR1.

The address entered will be used as the start of a 1K or 2K block of RAM in the computers memory by the program, transfer and compare routines; for the 'Dump' routine, the normal operating address of the chip should be entered. This address will be printed at the start of each line of data, incrementing by 10H for each line.

P – PROGRAM EPROM FROM DATA IN RAM

After obtaining the address to be used as the start of the data to be put in EPROM and setting up the counters, etc., the routine tests the value at ROMFLG to decide whether 1K or 2K chips are to be programmed. Depending on this value, it selects the appropriate programming routine; two separate routines are required because the programming requirements of the two types of chip are very different. 2708s need each address to be cycled a large number of times (100 – 1000) with a programming pulse of between .1 and 1 millisecond., to produce a total 'burn' time of 100 milliseconds per address. 2516/2716 chips need only one cycle, with a

programming pulse of 50 milliseconds per address. It takes about 2 minutes to program either type.

While the programming is going on, a display is put on the screen to show that something is happening. With 2708s the number of programming cycles left is displayed (in hexadecimal). With 2K EPROMS a count is output every 100H (256 decimal), beginning with 00 at the beginning of the first block.

Note that this software is written for a 4 Mhz clock and NO WAIT STATES. If either are changed, then the value 0E0H in the B register (for the 2708 routine), or 1D00H in BC (2516/2716 routine) will have to be changed. Short delays are written into the software to allow time for line stabilisation or chip 'set-up'.

C – COMPARE CONTENTS OF EPROM WITH RAM

This routine will compare the EPROM and RAM, byte by byte. It may be used to check for correct programming, or to find small discrepancies between EPROMs and RAM that should be identical. If a mismatch is found the address of the byte in RAM that did not correspond with the 'EPROM' will be printed on the screen, and a message that the data did not match will be printed at the end of the routine. If the EPROM and RAM match the routine will end with a suitable message.

T – TRANSFER DATA FROM EPROM TO RAM

This routine will quickly copy the contents of the chip into RAM, starting at the RAM address entered. This data may then be disassembled, modified, relocated, or used to make a back-up copy as desired. On completion of the routine a message is displayed, as there is no other indication that the routine has run its course.

D – DUMP TO PRINTER

This routine was written with the 'IMP' printer in mind, and so it interfaces through the serial port. A handshake routine is included (using bit 7 of the keyboard port), to avoid having to set up user routines. The program starts by requesting the normal address of the EPROM. It prints this address, followed by sixteen bytes of data and the ASCII characters corresponding to this data (for characters 20H to 7BH; all other characters are printed as '.'). A new line is started, and the address is updated, and the routine is continued until all the data in the EPROM has been printed out.

The routine works by reading sixteen bytes from the chip into a workspace buffer (label LINBUF in the source code, pointed to by the IY register). These bytes are then printed, another sixteen bytes read in, and so on.

THE HARDWARE

The author's unit is built in two parts. A diecast box, 4.5" x 6.5" x 2", is used as a base and contains a small power supply that provides +5, +12, -5, -12 and +26 volts (the -12 volt line is not needed by the programmer, but it is easy to include and makes the power supply useful for other circuits). The electronics are built on a piece of 0.1" matrix Veroboard, that sits on top of the box. Power could be taken from the computer supply, as only a few milliamps are needed, but a 26 volt generator would still be required. By providing a completely separate power supply the unit can be made much more portable.

Two EPROM sockets are fitted to the unit; one is for 1K chips, the other for 2K chips. To avoid the possibility of damage the sockets should be CLEARLY marked with the chip type, and pin 1 should also be marked. The use of zero insertion force sockets is strongly recommended, to prevent wear and tear on the chips and sockets. Only one socket should be used at a time.

The Z80 PIO has a low drive capability, and buffering is desirable. Pin 20 of the 2708 (WE) rises to 12 volts during programming. Since this is well above TTL levels, the use of a high voltage rated buffer is necessary. The 7406 is suitable, as it is rated at 30 volts. Double buffering is used in the unit as this provides the required number of signal inversions, low loading of the PIO, and the necessary voltage isolation. Buffer IC1 is a CMOS 4049 hex inverter chip; IC2 is a 7406, backed by a couple of BC108/9 transistors to make up the required number of inverters.

IC3 is a CMOS 4040 12 stage binary counter, capable of counting from 0000H to 0FFFH (0 to 4095 decimal). In this unit a count of 03FFH is used for 2708s and a count to 07FFH for 2K chips. The spare output might be used in the future to extend the unit to 4K chips. Port A of the PIO is used for data, and port B for control. Normally port A is set to input and port B to output, but during programming both ports are output.

PORT B BIT ASSIGNMENT

BIT 0	Controls the 26 volt programming pulse through the high speed switch formed by TR1, TR2 and TR3.
BIT 1	Controls the $\overline{\text{WE/CS}}$ signal on pin 20 of the 2708 socket, and the $\overline{\text{OE}}$ signal on pin 20 of the 2516/2716 socket.
BIT 2	A pulse from this bit is used to increment the address counter.
BIT 3	A pulse from this bit is used to reset the address counter at the start and end of each routine.
BIT 4	Used to switch the PGM input on pin 18 of the 2516/2716 socket.

BIT 5 When this bit is 0, it holds pin 20 of the 2708 at 5 volts, during normal READ operations. When set to 1, it allows pin 20 to pull up to 12 volts, for 'Write Enable'.

The power supply is fitted with a multipole switch on the D.C. outputs. This should be fitted in ALL cases, and should be used to switch off the programmer when changing chips. If the programmer is turned on/off with a mains switch when a chip is being inserted or removed, the chip may be damaged, because the low voltage supplies decay more quickly than the 26 volt line; this can result in a 26 volt pulse being written into address 0 of the EPROM, possibly PERMANENTLY!

COMPONENTS FOR THE PROGRAMMER.

Transistors		Resistors
TR1, 2	BC 548	4 x 10 Kohm
TR3	BC558	1 x 33 Kohm
TR4, 5	BC109	1 x 180 Ohm
Diodes		1 x 47 Ohm
4 x 1N4148		1 x 1 Kohm
Integrated Circuits		6 x 4.7 Kohm
IC1	CMOS 4049	Capacitors
IC2	TTL 7406	1 x 0.001 μ F
IC3	CMOS 4040	5 x 0.1 μ F

COMPONENTS FOR POWER SUPPLY

Transformer		Rectifier
15 – 0 – 15 volts, 6VA		1 A Bridge, 50 PIV
Diodes		Voltage Regulators
D1, 2	1N4002 or similar	78L12 (+12V, 100 mA)
Z1	26V, 1 watt Zener	78L05 (+5V, 100mA)
Resistors		79L12 (-12V, 100mA)
2 x 4.7 Kohm		79L05 (-5V, 100mA)
1 x 1 Kohm		Capacitors
1 x 10 Kohm		4 x 0.47 μ F
1 x 15 Kohm		2 x 0.22 μ F
Single pole mains switch		2 x 4700 μ F, 25V
Five pole low voltage switch		2 x 470 μ F, 64V

The full circuit diagrams of the programmer and power supply, a Veroboard layout of the programmer, and the software for its operation will be given in the next issue of the magazine.

* * * * *

THE ZILOG Z800

by Rory O'Farrell

Zilog have announced the Z800, a replacement upgrade for the Z80. Information on the new processor is scant, but in a brief press release Zilog claim the following:-

- Three to five times the performance of the Z80A with comparable speed memory,
- On chip internal clock; 12 18 & 25 Mhz,
- Expanded instruction set that is binary compatible with all Z80 instructions,
- Multiply and divide instructions,
- On chip memory management and protection unit,
- Direct addressing of half a megabyte of memory (524288 bytes),
- Programmable bus timing (wait states selectable in software),
- Multiplexed address/data bus (i.e., address and data lines share the same pins) with Z80 bus signals for easy interfacing to Z80 family chips.

It is claimed that the instruction set is more powerful than that of the Z80, and that it incorporates many of the features of the Z8000. The chip can be used with any of the Z80 or Z8 peripheral chips.

The register structure seems to be very close to that of the Z80. There are two sets of registers, each comprising an accumulator, a flag register, and six general purpose registers. Transfer of data between these duplicate sets is accomplished by the use of 'exchange' instructions. Zilog claim that the result is a faster response to interrupts, and easy implementation of context switching for multi-user processing. In addition there are the interrupt and refresh registers, and two 16 bit index registers. Two implied stack pointers are available: the system stack pointer (which we know and love?) and a user stack pointer. The CPU mode of operation will determine which of these pointers is used. The user stack pointer will facilitate the writing of very efficient high-level language compilers and interpreters.

The allowable data types are bits, BCD digits (nibbles, 4 bits), bytes (8 bits), words (16 bits), and byte strings up to 64 Kbytes long. The standard Z80 instruction set is extended with 8 and 16 bit multiply and divide, and the SET and TEST instruction. In addition, there is a fourth interrupt mode, which provides more flexibility in handling interrupts and traps. The new CPU has a comprehensive trapping structure, allowing for single stepping, system calls, and privileged instruction traps.

The chip offers programmable bus timing. It can insert, under software control, wait states into both memory and I/O transactions. The on-chip clock can also be programmed – an example is quoted of running 6 Mhz memory from the internal 12

Mhz clock. The clock can be controlled from an external crystal, or from an internal oscillator, and is available to the rest of the system. Refresh is provided by the chip; software can select the interval between successive refreshes, or even suspend it entirely!

The on-chip memory management unit provides for a flexible memory structure, by allowing dynamic page relocation, as well as write protect features. The 16 address lines output by the CPU are transformed into 19 bit physical addresses. This large cache of memory will facilitate multiple users (as for example, in schools), or foreground/background processing (playing Adventure and monitoring the nuclear power plant at the same time!).

Delivery of the new CPU is not expected until the first quarter of 1983, and a price has not yet been quoted. It should be stressed that the chip will not be pin-for-pin compatible with the Z80. however, it should not be impossible to make a very compact interface board, although until detailed pinouts and bus timings are published this can only be a dream. If the promise is kept of full software compatibility with the Z80, and three to five times the throughput with the same speed memory, then this will be quite some chip!



A/D BOARD FOR NASCOM

£135 + VAT

Fast Analogue to Digital conversion on the NASCOM

- | | |
|-----------------------------|-------------------------------|
| * 8 Bit resolution | * Sample and hold |
| * 8 input channels | * Overvoltage protection |
| * 30 microsecond conversion | * Full flag/interrupt control |
| * Prototyping area | * Built and tested |

EPROM PROGRAMMER

£63 + VAT

- | | | |
|------------|--------------------|-------------------------------|
| * Programs | 2708/2716 – 3 rail | * Zero insertion force socket |
| | 2508/2758 – 1 rail | |
| | 2516/2716 – 1 rail | |
| | 2532/2732 – 1 rail | * Built and tested |

GRAPHICS BOARD FOR NASCOM

£55 + VAT

Very high resolution graphics on your NASCOM

- | | |
|--------------------------------|------------------------------|
| * 384 x 256 bit mapped display | * Graphics software supplied |
| * Mixed text and graphics | * Full software control |
| * 4Mhz NASCOM required | * Built and tested |

DUNCAN LANGUAGE FOR NASCOM

£12 + VAT

- * DUNCAN is a fast real time interpreter / control language for NASCOM and was featured in "PRACTICAL COMPUTING" May 81.

6 LALEHAM AVENUE, MILL HILL, LONDON, NW7 3HL. Tel. 01-959 0106

nascom



- * Housed in strong, stylish case with high quality QWERTY keyboard.
- * 0.7Mbyte floppy disc system available in matching case.
- * Full 8K RAM, expandable to 200K with page mode and RAM boards.
- * Factory-built options plus additional range of Nascom-approved hardware and software.

Think of Nascom 3 as an advanced personal computer, built to professional standards and offering the total systems versatility needed by enthusiasts whose imaginations are already ahead of the toy computer field.

Think of Nascom 3 as the powerful heart of a truly versatile educational or business computer system, with added peripherals and an extensive range of firmware and software options.

Or think of Nascom 3 as a custom-structured industrial control unit, well capable of cutting production costs in many key areas.

Nascom 3; reliable, expandable, affordable - and backed by one of Britain's best known engineering groups. Think about it.

OTHER NASCOM PRODUCTS

- * Nascom 1 from £125 + VAT
- * Nascom 2 from £225 + VAT
- * Memory Extension Unit from £80 + VAT
- * Disc systems from £375 + VAT
- * Input/Output board from £37 + VAT

NEW

- * Advanced video controller from £155 + VAT
- * Enhanced BASIC from £40 + VAT
- * Pascal compiler from £45 + VAT
- * Compiled BASIC from £150 + VAT

SPECIAL OFFER IMP PRINTERS £109 + VAT WHILE STOCKS LAST

NASCOM DEALERS

UK

Bits & PCs
Wetherby 0937 63774
Business & Leisure Microcomputers
Kenilworth 0926 512127
CIEL
Edinburgh 031 337 5611
Crystal Electronics
Torquay 0803 22699
Electrovalue Ltd
Egham 0784 33603
Manchester 061 432 4945
Eley Electronics
Leicester 0533 871522
Henry's Radio
London 01 402 6822

Horizon Ltd
Crymch 02397 9656
Interface Components Ltd
Amersham 02403 22307
JPS
Huntingdon 0487 840710
Leeds Computer Centre
Leeds
Micro Comms
Aberdeen 0224 633385
Micro Print
Stoke-on-Trent 0782 48348
Midshire's Computer Centre
Crewe 0270 211086
Off Records
London 01 674 1205

Parkstone Electronics
Poole 0202 748555
Semicomps Northern Ltd
Kelsa 0673 243666
Skytronic
Nottingham 0602 45053
SRS Microsystems
London 01 363 8060
Stew's Electronic Supply Co
Cardiff 0222 41905
System Electronics
Brighton 0273 26061
Target Electronics
Bristol 0272 421196
Trading Post
Hastings 0424 437875

Zeta Computers
Stonehouse 045 382 2444

OVERSEAS

Semicaps APS
Copenhagen 221510 (Denmark)
JCS Composants
Paris 265 42 62 (France)
MK-Systemtechnik
Garmersheim 7274 2756 (Germany)
MAAS Computer Consultants
Bunde (L) 43 64 11 47 (Netherlands)
Microcomp AB
Uppsala 1300 70 (Sweden)
SW Instruments
Helsinki 738 265 (Finland)

Lucas Logic



XTAL BASIC XTRA

by David Elliot

For all you Nascom buffs with Xtal Basic 2.2, here follows a series of articles which show you how to get the best out of this Basic's 'expandability' – its facility for the addition of extra machine code routines. By the time you have added a few custom-built commands, your Microsoft pals will be green with envy. Just to whet your appetite, here are some of the additional commands used with Xtal Basic on my own system, which is a 32K Nascom 1 to which I have added 256 programmable characters (which can be used as high-res graphics):

DOKE	DEEK	RAD	DEG	CLS
SWAP	SETBIT	RESBIT	BIT	AUTO
AOFF	SET	RESET	DRAW	MOVE
SOUND	TUNE	INIT	GCLEAR	SHOW
GXOR	GOR	SCREEN	PON	POFF

Many of these commands are designed to work with the programmable graphics board, and make games programming much simpler.

LOADER PROGRAM

The Xtal Basic handbook explains how to insert the additional command name into the command table, and the vector to the machine code routine into the vector table, but just to make things even easier, here is a machine code loader program which executes from 4E00H.

Xtal Basic is first read in, and then the loader program itself is loaded and executed. It first asks for the name of the command; if no name is entered the loader accepts the following machine code as a subroutine, rather than as an extra command. When a name is entered it is automatically added to the end of the command table and the vector is set to beginning of the machine code routine.

When the machine code is being entered the loader automatically prints the address at the beginning of the line and then waits for the code to be typed in. To allow for code relocation, the loader has a command '+', which takes the following 16-bit number and adds the start of the command to it before placing it in memory.

There is limited amount of error-checking to test the numbers entered for the correct number of digits. If an error is detected, the cursor is positioned at the error, which can then be changed, using the Nas-Sys screen editing.

When the machine code routine is complete a full stop is entered. The loader then asks if another command is to be entered. If the response is 'Y', the program continues, adding the next command immediately after the last. Otherwise it changes the Basic Text Pointer (at 1283H) to the start of the next 256-byte page. In Xtal Basic the text must start on a page boundary.

```

0090      ;
0100      ; *****
0110      ; ** COMMAND LOADER BY D. ELLIOT **
0120      ; *****
0130      ;
4E00      0140      ORG £4E00      ; EXECUTION ADDRESS
4E00      EF      0150      LOADR      RST 40      ; PRINT STRING
4E01      0C      0160      DEFB 12      ; CLEAR STRING
4E02      456E7465 0170      DEFM"ENTER COMMAND/FUNCTION NAME"
4E1E      0D00      0180      DEFB 13,0      CRLF, END OF STRING
4E20      DF63      0190      SCAL INLIN      ; INPUT LINE
4E22      1A      0200      LD A, (DE)      ; GET 1ST CHARACTER
4E23      FE20      0210      CP "      ; NAME ENTERED?
4E25      2832      0220      JR Z,NOTCOM      ; JUMP IF NOT
4E27      21800E      0230      LD HL, NAMES      ; SET POINTER
4E2A      0EFF      0240      LD C,-1      ; RESET COUNTER
4E2C      7E      0250      LOOP      LD A (HL)      ; GET NEXT BYTE
4E2D      CB7F      0260      BIT 7,A      ; START OF WORD?
4E2F      2805      0270      JR Z,NEXT      ; IF NOT, TRY NEXT
4E31      0C      0280      INC C      ; INCREMENT COUNTER
4E32      FE80      0290      CP £80      ; END OF TABLE?
4E34      2803      0300      JR Z,ADDNAM      ; ADD TO TABLE
4E36      23      0310      NEXT      INC HL      ; INCREMENT POINTER
4E37      18F3      0320      JR LOOP      ; NEXT CHARACTER
4E39      1A      0330      ADDNAM      LD A (DE)      ; GET NEXT BYTE
4E3A      CBFF      0340      SET 7,A      ; SET BIT 7
4E3C      77      0350      LD (HL),A      ; SAVE 1ST CHAR.
4E3D      23      0360      ADD1      INC HL      ; INCR. POINTERS
4E3E      13      0370      INC DE
4E3F      1A      0380      LD A,(DE)      ; GET CHARACTER
4E40      FE20      0390      CP "      ; END OF NAME?
4E42      2803      0400      JR Z,ADD80      ; IF SO, INSERT £80
4E44      77      0410      LD (HL),A      ; SAVE CHARACTER
4E45      18F6      0420      JR ADD1      ; CONTINUE
4E47      3680      0430      ADD80      LD (HL), £80      ; ADD DELIMITER
4E49      59      0440      LD E,C      ; CALCULATE ADDRESS
4E4A      1600      0450      LD D,0      ; OF VECTOR
4E4C      EB      0460      EX DE,HL
4E4D      29      0470      ADD HL,HL
4E4E      11800F      0480      LD DE,VECT      ; START OF TABLE
4E51      19      0490      ADD HL,DE
4E52      ED5B8312 0500      LD DE,(TEXT)      ; SET VECTOR
4E56      73      0510      LD (HL),E      ; AT END OF BASIC
4E57      23      0520      INC HL
4E58      72      0530      LD (HL),D
4E59      EF      0540      NCOM      RST 40      ; PRINT STRING
4E5A      456E7465 0550      DEFM /ENTER MACHINE CODE./
4E6D      0D00      0560      DEFB 13,0      ; CRLF, STRING END

```

4E6F	FD2A8312	0570		LD IY, (TEXT)	; ZERO POINTER
4E73	FDE5	0580	IN3	PUSH IY	; CALCULATE ADDRESS
4E75	E1	0590		POP HL	
4E76	ED4B8312	0600		LD BC, (TEXT)	; BASE ADDRESS
4E7A	B7	0610		OR A	; RESET CARRY FLAG
4E7B	ED42	0620		SBC HL, BC	; SUB. BASE ADD.
4E7D	DF66	0630		SCAL TBCD3	; PRINT ADDRESS
4E7F	DF63	0640	IN0	SCAL INLIN	; INPUT LINE
4E81	CDBB4E	0650		CALL NUM16	; GET ADD. IN BC
4E84	FD2A8312	0660		LD IY, (TEXT)	; CALCULATE PROPER
4E88	FD09	0670		ADDIY, BC	; ADDRESS
4E8A	1A	0680	IN1	LD A, (DE)	; GET CHARACTER
4E8B	FE20	0690		CP "	; A SPACE?
4E8D	2003	0700		JR NZ COMND	; IF NOT, JUMP
4E8F	13	0710		INC DE	; TRY NEXT
4E90	18F8	0720		JR IN1	; CHARACTER
4E92	FE2E	0730	COMND	CP "	; END OF PROGRAM
4E94	284D	0740		JR Z, END	
4E96	B7	0750		OR A	; END OF LINE?
4E97	28DA	0760		JR Z, IN3	; GET NEXT LINE
4E99	FE2B	0770		CP "+	; RELATIVE NUMBER?
4E9B	2014	0780		JR NZ, IN2	; IF NOT, 8 BIT NO.
		0785			
		0790			; IF YES, THEN INPUT A 16 BIT NUMBER
		0800			; AND ADD OFFSET TO PROPER ADDRESS
		0805			
4E9D	2A8312	0810		LD HL, (TEXT)	; GET BASE ADD.
4EA0	13	0820		INC DE	; START OF NUMBER
4EA1	CDBB4E	0830		CALL NUM16	; OFFSET IN BC
4EA4	09	0840	CHK	ADD HL, BC	; CALCULATE ADDRESS
4EA5	FD7500	1010		JR NZ, ERROR	; IF NOT, ERROR
4ECC	C9	1020		RET	; RETURN
4ECD	DF64	1030	NUM8	SCAL NUM	; GET 8 BIT NUMBER
4ECF	380C	1040		JR C, ERROR	; ERROR DETECTED
4ED1	ED4B210C	1050		LD BC (NUMV)	; GET NUMBER
4ED5	3A200C	1060		LD A, (NUMN)	; CORRECT LENGTH?
4ED8	FE02	1070		CP 2	; TWO CHARACTERS
4EDA	2001	1080		JR NZ, ERROR	; IF NOT, ERROR
4EDC	C9	1090		RET	; RETURN
4EDD	ED53290C	1100	ERROR	LD (CURSR), DE	; POSITION CURSOR
4EE1	189C	1110		JR IN0	; RE-INPUT LINE
4EE3	EF	1120	END	RST 40	; PRINT STRING
4EE4	416E6F74	1130		DEFM "ANOTHER COMMAND (Y/N)"	
4EFB	1100	1140		DEFB CUL, 0	
4EFD	DF7B	1150	END0	SCAL BLINK	; GET ANSWER
4EFF	FE59	1160		CP "Y	; IS IT 'YES'
4F01	2008	1170		JR NZ, END1	
4F03	F7	1180		RST CRT	; PRINT IT
4F04	FD228312	1190		LD (TEXT), IY	; RESET POINTER
4F08	C3004E	1200		JP LOADR	; AND CONTINUE
4F0B	FE4E	1210	END1	CP "N	; ANSWER NO?
4F0D	20EE	1220		JR NZ, END0	; INPUT AGAIN
4F0F	F7	1230		RST CRT	; PRINT N
4F10	FDE5	1240		PUSH IY	; TRANSFER TO HL
4F12	E1	1250		POP HL	
4F13	7D	1260		LD A, L	; IS IT ON A PAGE
4F14	B7	1270		OR A	; BOUNDARY?

4F15	2803	1280		JR Z, OK	; IF SO, END
4F17	24	1290		INC H	; ADD 256 TO END
4F18	2E00	1300		LD L,0	; ZERO LOW BYTE
4F1A	228312	1310	OK	LD (TEXT), HL	; STORE POINTER
4F1D	DF5B	1320		SCAL MRET	; RETURN TO MONITOR
- -	- -	- -	- -	- -	- -

The first example of an added command is a routine which provides automatic line numbering. The listing of this routine is followed by a demonstration of the entry of the corresponding machine code using the loader program.

		0090	;		
		0100	;	*****	
		0110	;	** AUTO LINE NUMBER BY D. ELLIOT **	
		0120	;	*****	
		0125	;		
3000		0130		ORG £3000	
		0135	;		
		0140	;	ROUTINES IN CRYSTAL BASIC 2.2	
		0145	;		
3000	2BF5	0150	OVEC	EQU £2BF5	; OUTPUT VECTOR+1
3000	2781	0160	PRTHL	EQU £2781	; PRINT HL IN DEC.
3000	1761	0170	INNUM	EQU £1761	; GET NUMBER
3000	154C	0180	TSTCOM	EQU £154C	; SKIP COMMA
		0185	;		
		0190	;	MODIFIED OUTPUT ROUTINE WHICH CHECKS	
		0200	;	FOR A NEW LINE, AND THEN OUTPUTS THE	
		0210	;	NEXT LINE NUMBER	
		0215	;		
3000	FE5D	0220	AOUT	CP £5D	; NEW LINE?
3002	2064	0230		JR NZ, COUT	; IF NOT, PRINT
3004	F7	0240		RST CRT	; PRINT CHARACTER
3005	222E30	0250		LD (BUFFR), HL	; SAVE POINTER
3008	213030	0260		LD HL, NOUT	; CHANGE OUT. VECTOR
300B	22F52B	0270		LD (OVEC), HL	
300E	2A2A30	0280		LD HL, (INC)	; GET INCREMENT
3011	EB	0290		EX DE, HL	; INTO DE, AND LAST
3012	2A2C30	0300		LD HL, (LAST)	; LINE NO. IN HL
3015	D5	0310		PUSH DE	
3016	E5	0320		PUSH HL	
3017	CD8127	0330		CALL PRTHL	; HL TO SCREEN
301A	E1	0340		POP HL	; AND TO BUFFER
301B	D1	0350		POP DE	
301C	19	0360		ADD HL, DE	; CALC. NEXT NO.
301D	222C30	0370		LD (LAST), HL	; AND STORE ITVN
3020	210030	0380		LD HL, AOUT	; RESET VECTOR
3023	22F52B	0390		LD (OVEC), HL	
3026	2A2E30	0400		LD HL (BUFF)	; RESTORE POINTER
3029	C9	0410		RET	; RETURN
		0415	;		
		0420	;	VARIABLE STORAGE	
		0425	;		
302A	0002	0430	INC	DEFS 2	; INCREMENT

302C	0002	0440	LAST	DEFS 2	; LAST NUMBER
302E	0002	0450	BUFF	DEFS 2	; NEXT CHAR. ADD.
		0455			
		0460			; PRINT CHARACTER ON SCREEN AND
		0470			; INTO BASIC INPUT BUFFER
		0475			
3030	E5	0480	NOUT	PUSH HL	; GET LAST ADDRESS
3031	2A2E30	0490		LD HL, (BUFF)	; SAVE CHARACTER
3034	77	0500		LD (HL), A	; INCREMENT ADDRESS
3035	23	0510		INC HL	; SAVE ADDRESS
3036	222E30	0520		LD (BUFF), HL	
3039	E1	0530		POP HL	
303A	F7	0540		RST CRT	
303B	C9	0550		RET	
		0555			
		0560			; AUTO COMMAND
		0565			
303C	110030	0570	AUTO	LD DE, AOUT	; CHANGE VECTOR
303F	ED53F52B	0580		LD (OVEC), DE	
3043	3EC3	0590		LD A, £C3	; SET UP JUMP
3045	32F42B	0600		LD (OVEC-1),A	
3048	CD6117	0610		CALL INNUM	GET START NUMBER
304B	ED532C30	0620		LD (LAST), DE	
304F	CD4C15	0630		CALL TSTCOM	; SKIP COMMA
3052	CD6117	0640		CALL INNUM	; GET INCREMENT
3055	ED532A30	0650		LD (INC), DE	
3059	C9	0660		RET	
		0665			
		0670			; AOFF COMMAND
		0675			
305A	E5	0670	AOFF	PUSH HL	; RESTORE OUTPUT
305B	216830	0680		LD HL, COUT	; VECTOR TO NORMAL
305E	22F52B	0690		LD (OVEC), HL	
3061	E1	0700		POP HL	
3062	3EC3	0710		LD A, £C3	; SET UP JUMP
3064	32F42B	0720		LD (OVEC-1),A	
3067	C9	0730		RET	
		0735			
		0740			; CRT OUTPUT ROUTINE
		0745			
3068	F7	0750	COUT	RST CRT	
3069	C9	0760		RET	

The AUTO command format is AUTO xxxx, yyyy, where xxxx is the starting line number, and yyyy is the increment.

The automatic line numbering routines are entered using the loader program as follows:-

ENTER COMMAND/FUNCTION NAME.

ENTER MACHINE CODE

0000	FE	5D	20	64	F7	22	+002E	21	+0030	22	F5	2B	2A	+002A
0011	EB	2A	+002C	D5	E5	CD	81	27	E1	D1	19	22	+002C	

0020	21	+0000	22	F5	2B	2A	+002E	C9	FF	FF	FF	FF	FF	FF	FF
0030	E5	2A	+002E	77	23	22	+002E	E1	F7	C9	.				

ANOTHER COMMAND (Y/N)?

ENTER COMMAND/FUNCTION NAME

AUTO

ENTER MACHINE CODE

0000	11	+FFC4	ED	53	F5	2B	3E	C3	32	F4	2B	CD	61	17	ED
0010	53	+FFF0	CD	4C	15	CD	61	17	ED	53	+FFEE	C9	.		

ANOTHER COMMAND (Y/N)?

ENTER COMMAND/FUNCTION NAME

AOFF

ENTER MACHINE CODE

0000	E5	21	+000E	22	F5	2B	E1	3E	C3	32	F4	2B	C9	F7	C9.
------	----	----	-------	----	----	----	----	----	----	----	----	----	----	----	-----

ANOTHER COMMAND (Y/N)?

No name is entered for the first section of machine code, as this code is a series of subroutines used in the AUTO command. Addresses entered under the '+' option are measured relative to the start of the current section of code being entered. Thus any references to subroutines which precede the current section will be negative. For example, in the second section of code, the AUTO command, there are three references to the subroutines in the first section which are all entered as negative hexadecimal numbers (FFC4, FFF0, FFEE).

The six bytes of workspace used by the AUTO routines can be entered as any six 8 bit values – in the example above they are entered as six FF's.

.

LETTERS

Dear Sir,

Further to Mr. Bowden's letter in issue 3, I must also add my congratulations to Chris Blakmore for his excellent MONITOR.COM, which I call N3.COM allowing me to type N3 and be in Nas-Sys. I cannot help him to convert the RAM version of Zeap 2 to run with the moved video RAM, but I can help anyone who wants to run the EPROM version. The bytes to be changed are:-

D5D4	D62D	D83C	D844	DB1F	DB7D	DBE3	DBF4
DBFD	DC06	DC12	DC68	DCA5	DCAE	DCB8	DDC8
DE06	DE16	DE26	DE59	DE95	DECD		

If the modifications suggested in INMC7 have been carried out, it will be necessary to change the byte at DFBA. Each of the addresses at these bytes will be found to be in the range 08 – 0B; F0 should be added. If it is required to run the EPROM version in RAM for test purposes, the byte at DF52 should be changed to 00.

In order to run D-BUG and Nas-Dis with the revised video RAM, it is only necessary to change the bytes at C01A, C0B3 and C118.

J. T. Nestor, East Kilbride

Dear Ed,

After reading the article on TRS-80 tapes in issue 3, I thought the following might be of interest.

It is possible to read UK101 tapes directly and very simply. Providing the tape has been recorded at 300 or 1200 Baud (most will be at 300), go into mode X from Nas-Sys, initialise Basic with the J command, and then play the tape without entering any commands. The program listing will be printed onto the screen and into memory with the original Basic line numbers. On completion, the program can be modified to run on the Nascom with usually not too much effort!

R. M. Dowling, Welling

Dear Sir,

I recently bought a V&T Superdeck recorder, which came with a demo tape but no instructions. As the company has closed down, is there anyone who can tell me how to connect the Superdeck to my Nascom 2. The twelve connections are marked C, S, R, W, E, D and G, Common, Tx and Rx Clock, and Tx and Rx Data. I'd be grateful for any help.

M. Harrison, 8, Langleys Gardens,
Prestwich, Manchester

FOR SALE	RAM A card with 8K	£45 o.n.o.
	RAM B card with 16K	£70 o.n.o.
	Both in full working order.	C. Bowden

Tel. 0209 860 480 (Evenings) 0209 712 780 (daytime)

HANDS ON

by Viktor

The End of the Beginning (or vice versa?)

READ, DATA & RESTORE

This group of instructions can be extremely useful in certain programming situations, for instance, where a large number of values are to be assigned to variables before the main body of the program can be run. For example, in a program to play music you might want to hold the frequencies of, say, 85 notes in an array. After dimensioning the array, by the command DIM A(84), the values could be assigned as follows:

```
20 A(0)=123:A(1)=125:A(2)=128. . . . .A(84)=222
```

It is much simpler, however, to put the values in DATA statements and then READ them all into the array in one go:

```
10 DATA 123, 125, 128 . . . . .
20 DATA . . . . . 216,220,222
30 FOR J=0 TO 84: READ A(J): NEXT
```

Note that because the array contains a member A(0), you can always dimension it to one less than the number of array members needed

When a BASIC program is run, the interpreter looks right through the program and notes the position of all items included in the DATA statements. The DATA statement pointer is then set to the beginning of the list. As each READ statement is executed, the pointer is moved onto the next item. If at any time you want the program to start at the beginning of the list, you just use the command RESTORE. You may also want to READ from various positions down the list. As long as this coincides with a line number you can use RESTORE X (where X is the relevant line number)

A very good example of this was in the Hangman program in the last issue of Micropower, where the author needed first to refer to Numeric data string at line 8000 and then to String data starting at line 9000.

It is possible but not advisable to mix numeric and string items in DATA statements e.g.

```
10 DATA "Fred",5,"Jim",7,8,"Harry"
20 READ A$,X,B$,Y,Z,C$
```

However, if you make an error and try to read one type of data into the other type of variable you will get a 'SYN' error – and serves you right !!

Program lines similar to the following have been included in many simple computer-based learning tests.

```
10 READ A$, B$
20 PRINT "What is the capital of";A$
30 INPUT C$
40 IF C$=B$ THEN PRINT "Correct": GOTO 10
50 PRINT "Hard Luck –Try again":GOTO 20
60 DATA SCOTLAND, EDINBURGH, EIRE, DUBLIN
70 DATA FRANCE, PARIS, WEST GERMANY, BONN
```

Obviously one would enlarge on the program, with random or sequential testing, some system of marking results and suitable messages to 'humanise' the exercise.

It is self-evident that the basic formula using READ, DATA & RESTORE can be adopted in all such programs.

SET, RESET, POINT

As everyone will know by now, the basic Nascom screen has 16 lines of 48 characters – i.e. 768 screen locations into which you can PRINT or POKE any of the character set. The commands SET, RESET & POINT give you control of a much higher number of smaller areas on the screen. In effect, each character space is divided into 6 (2 horizontal x 3 vertical), and each 'pixel' as they are called, can then be turned on or off by SET and RESET. This gives an effective screen resolution of 96 x 48; computer manufacturers have been known to refer to this as 'high resolution graphics', but this term should really be reserved for the much higher resolution obtainable with bit-mapped graphics or with a programmable character generator.

As an illustration, we can randomly set all the pixels thus:

```
10 CLS
20 REM * SET X TO A RANDOM NO. BETWEEN 0 AND 47
30 X=INT(RND(1)*47) 40 REM* SET Y IN RANGE 0 – 95
50 Y=INT(RND(1)*95)
60 SET(X,Y) : GOTO 20
```

Eventually the screen would be composed entirely of 'set' pixels. Now we can use RESET in a similar fashion. First remove the 'GOTO 20' in line 60 and then enter:

```
70 REM* NOW DO A RANDOM RESET
80 X=INT(RND(1)*47)
90 Y=INT(RND(1)*95)
100 RESET (X,Y) : GOTO 20
```

The pixels will now be randomly reset. To complete the program we could use POINT to test whether certain pixels had been set, and if so start at the beginning again. Remove the 'GOTO 20' in line 100 and then enter:

```

110 REM* TEST A BLOCK OF PIXELS 40 X 30
120 FOR S=15 TO 75 STEP 15
130 FOR T=15 TO 45 STEP 15
140 IF POINT (S,T)=1 THEN 10
150 NEXT T,S
160 GOTO 20

```

PRINTING CHARACTERS FROM THE KEYBOARD

In the manual there is an appendix headed 'Single Character Input of Reserved Words'. From the list you will see that when typing in a program you can use various combinations of keys to obtain single characters (often referred to as 'Tokens') which the computer interprets as instructions. For example:-

? = PRINT CTRL/GRA/H =GOTO.

This does save time and space when keying in a long program, but also causes a lot of headaches when editing. When the program is listed the tokens are expanded to the full reserved words; consequently lines may exceed 48 characters, and when you try to edit them you lose characters from the end. It is all too easy to 'crash'. In Direct Mode, however, they are always useful. E.g. GRA/Space = LIST.

You might also make use of this facility when designing graphics shapes for use in a program. It is worthwhile marking the chart supplied in the manual with the key designations. For instance, the first two lines (32 chars.) are obtained by depressing the graphics and control keys plus @, A-Z, [, \,], ^ and _.

Let us look at what happens when we press the graphics and control keys. The former sets Bit 7, while the latter flips Bit 6. E.g. The @ character (shift@) is 40 in hex or 01000000 in binary, the bits being numbered 7 to 0 from left to right. Setting Bit 7 gives 1100 0000, or C0 in hexadecimal, and flipping Bit 6 gives 1000 0000 or 80 hex. Thus character 80 hex can be typed with CTRL/GRA/shift@. Similarly, 8F in hexadecimal is obtained with CTRL/GRA/O.

Character FF illustrates the effect of flipping Bit 6 from off to on. The ? has a hex value of 3F (0011 1111). CTRL/? gives 7FH (01111111) , and GRA/CTRL/? gives 0FFH (11111111)

You can always try out various key combinations by typing them directly into a Basic line, and then expanding them by LISTing the 'program'. For example, type in a line number and then hold the Graphics key down while you enter A,B, C, D, E, F. Now press 'Return' and LIST the line. You will find that the interpreter expands it to:-

10 COSSINTANATNPEEKDEEK

As a final point on this topic, I thought it would be interesting to take a look at the way the BASIC stores reserved words. First enter the command NEW, and then type in the following line:

```
10 PRINT"MIKE":END:SCREEN 15,12
```

Now reset and tabulate from 10FA hex. You will find the following code:

```
10FA      10 11 0A 00 9E 22 4D 49
1102      4B 45 3A 80 3A 97 20 31
110A      31 35 2C 31 32 00 00 00
```

The first two bytes, 10 11, store the address of the start of the next line, the next two bytes, 0A 00, hold the line number, and then come the bytes which represent the data stored in the line. The first data byte, 9EH, represents the reserved word PRINT; as a line is entered the text is scanned, and if the Basic recognises a reserved word it is replaced by a hexadecimal number in which bit 7 is set. This speeds up programs, because the interpreter can more quickly recognise a reserved word and access the necessary machine code routines.

PRINT is followed by the ASCII codes for "MIKE" (22 4D 49 4B 22) and the separating colon (3A). Two more reserved words then appear, END (represented by 80H) and SCREEN (97H).

The end of the line is marked in the store by a zero, which is followed by a pointer to the start of the next line, a line number, more data, and so on. At the end of the program the zero marking the end of the line is followed by two further zeros in place of the line pointer.

You will notice that although there is no 'space' character (20H) after the line number bytes, the LIST command always inserts a single space to improve legibility. No matter how many spaces you put between the line number and the start of the text when you enter the program, the interpreter always removes them - and then puts one back when listing. This makes it difficult to use 'pretty printing' - that is, formatting of the text by use of different indentations to make the underlying structure of the program obvious at a glance. You can always indent a line by inserting a colon before the required spaces. For example:-

```
10 :   PRINT "THIS IS AN INDENTED LINE"
```

```
* - * - * - * - * - * - *
```

NASCOM USERS

Take a look at the NASCOM APPROVED HS-IN STORAGE SYSTEM. Where else can you get features like these . . .

- * A full on screen instant display of the catalogue.
- * Auto verification of each file as it is written.
- * CRC error checking.
- * Link selectable 2Mhz or 4Mhz option.
- * Fast data transfer rate of 6000 bps.
- * Powered from NASBUS.
- * 8" sq NASBUS compatible PCB.
- * Far more reliable than any floppy disk system.
- * 112K on-line storage with 2 drive system.

The HS-IN has a Command Set which makes it a floppy-disk "look-alike". It can load an 8K program in under 11 seconds and can store up to 56K (28 files) on each side of tape. Why spend £700 on a floppy disk system when the less expensive HS-IN system has a command set like this . . .

- B— Write a Basic file
- C— Instant display of catalogue.
- D— Delete file.
- J— Jump to Basic.
- N— Jump to NAS-SYS.
- Q— Warm start to NASPEN text editor.
- R— Read a file.
- T— Transfer file to another drive.
- W— Write a file.

- X— Exit and rewind cassettes.
- Z— Warm start to Basic.

This Mini-Cassette Storage System is technologically far ahead of anything like it on the market and is extremely reliable into the bargain. AND THE COST? Because we have been successful in quantity component purchases we have been able to lower the price until January 31st 1982 (the old price is in brackets).

Single Drive System built and tested £199 (£230)
Double Drive System built and tested £279 (£299)

Carriage £3.50.

We are Scotland's foremost NASCOM Dealers and keep in stock the full range of NASCOM products as described in the Lucas Logic Advert in this magazine. For the Christmas period and up to January 31st 1982 we are offering a **FREE Statistical Calculator** (without battery) with every NASCOM product worth more than £100 or each series of NASCOM products with a value totalling £100 or more in the same order. AND if you don't want the calculator . . . just 'phone and see if we have something else you need FREE — a book perhaps!

We now have the new NASCOM CASE in stock as well as many more new NASCOM related products.

COMPONENTS AT THE BEST PRICES IN BRITAIN

MICRO-SPARES now have a vast selection of Logic I.C.'s including 74; 74LS and CMOS full range. There are Z80's and support chips as well as resistors, capacitors etc. etc. . . far too many to list on this page. But to give you an idea of the prices just compare these . . .

	1-199	200 +
2114's (all speeds)	99p	POA
4116's (all speeds)	66p	POA

2708's	1.73p	POA
2716's Single + 5v	2.15p	POA
4118's	3.80p	POA

All components are fully guaranteed and are in stock as at 15th December 1981. Orders under £30 please add 50p p. & p. VAT not included. Send SAE for current price list. Official orders from all establishments welcome.

All components in stock sent same day.

NEW

Very shortly now MICRO-SPARES will be selling the all computer RS232C version of the HS-IN. The Mini-Cassette System is just as fast and files can be any length. The machine can be connected to computers, V.D.U.'s, Printers and

and other RS232C device. They will take the place of paper tape in loading engineer test programs for instance. Other communication modes are 20mA current loop, IEEE and Z80 bus.

SECOND HAND COMPUTERS

MICRO-SPARES keep a register of users that are buying or selling a computer. Stocks of second-hand machines — all in working order — are

available from the very small to the very large at extremely keen prices.



Micro-Spares

19 Roseburn Terrace, Edinburgh EH12 5NG.
Tel: 031-337 5611.




THE MAGIC HEXAGON

Why not solve it the easy way!

By G. P. Robert

The magic hexagon puzzle consists of arranging the numbers 1 to 19 in a hexagonal pattern (see below) in such a way that each row in any direction adds up to 38.

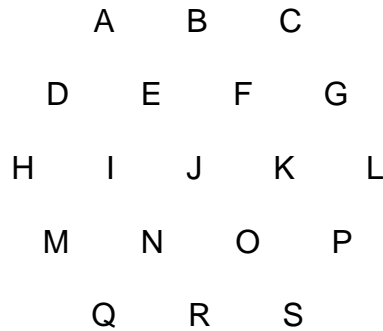

Unlike magic squares, which can be easily constructed if you know the trick, the solution to the Hexagon does not appear to possess any discernable regular pattern. The number of possible arrangements is a formidable 121,645,100,408,832,000. However, since any arrangement can be rotated six times through 60 degrees, and each of these positions has a mirror image, the actual number of distinctly different arrangements is reduced to a mere 10,137,091,700,736,000!

Inspection of the hexagon reveals one or two relationships which might help in reducing the prodigious task of finding solutions. For example, since the sum of the lines $(A+B+C)+(D+E+F+G)+(H+I+J+K+L)=3 \times 38$ and $(A+D+H)+(C+G+L)=2 \times 38$, then it follows that the remaining triangle of numbers $(B+E+F+I+J+K)$ must equal 38. Addition to this triangle of the line $(M+N+O+P)$ gives the large central triangle $(B+E+F+I+J+K+M+N+O+P)=2 \times 38$. Within this larger triangle the lines $(B+E+I+M)$ and $(B+F+K+P)$ together equal 2×38 . B, which occurs in both lines, must therefore equal the small residual triangle $(J+N+O)$. Similar relationships will, of course, exist in each of the 12 possible orientations of the Hexagon.

Use can be made of some of these relationships to shorten the search for a solution by trial and error. The listed program, which will run on a Nascom 1 or 2 under Nas-Sys, and could be adapted to run on any Z80 based microcomputer, systematically fills the hexagon from available numbers stored in a table at the bottom of the screen. At each position where a check can be carried out, an appropriate line or triangle of numbers is added up. If the total is 38 the program proceeds to the next position. If not, then a number is selected and the test is repeated. If the end of the table is reached without a satisfactory number being found the program retreats to the previous position and the search is continued.

For convenience in programming and display, the numbers 1 to 19 are represented by the letters A to S. At the start of the search, and when a solution has been found, the program pauses to allow the position to be noted down. Any key depression will cause the search to be resumed. The program terminates when there are no further possible arrangements.

The first solution will be found in just over four minutes, and the second in another two and a half minutes (at 4 Mhz). Further solutions will require considerably more patience, but those interested enough may wish to run the program exhaustively in order to uncover all the possible arrangements and discover if there exists more than one unique solution.

PROGRAM LISTING

0C80	3E 0C		LD A, 0CH
0C82	F7		RST ROUT
0C83	01 11 00		LD BC, 11H
0C86	11 1A 08		LD DE 081AH
0C89	21 A9 0D		LD HL, TITLE
0C8C	ED B0		LDIR
0C8E	3E 3F		LD A, 3FH
0C90	CD 28 0D		CALL HEXGON
0C93	3E 41		LD A, 41H
0C95	06 13		LD B, 13H
0C97	21 99 0B		LD HL, 0B99H
0C9A	77	TABLE	LD (HL), A
0C9B	3C		INC A
0C9C	23		INC HL
0C9D	10 FB		DJNZ TABLE
0C9F	DF 7B		SCAL BLINK
0CA1	3E 20		LD A, 20H
0CA3	CD 28 0D		CALL HEXGON
0CA6	03	FORWRD	INC BC
0CA7	3E 14		LD A, 14H
0CA9	B9		CP C
0CAA	28 4D		JR Z, SOLN
0CAC	CD 15 0D		CALL HEXLOC
0CAF	3E 40		LD A, 40H
0CB1	21 98 0B		LD HL, 0B98H
0CB4	3CONXTNUM		INC A
0CB5	FE 54		CP "T
0CB7	28 44		JR Z, REPLAC
0CB9	23		INC HL
0CBA	BE		CP (HL)
0CBB	20 F7		JR NZ, NXTNUM
0CBD	12		LD (DE) A
0CBE	36 20		LD (HL), 20H
0CC0	F5		PUSH AF
0CC1	E5		PUSH HL
0CC2	21 5B 0D		LD HL, CHKLST
0CC5	09		ADD HL, BC

0CC6	C5		PUSH BC
0CC7	4E		LD C (HL)
0CC8	AF		XOR A
0CC9	B9		CP C
0CCA	20 05		JR NZ, SUMCHK
0CCC	C1		POP BC
0CCD	E1		POP HL
0CCE	F1		POP AF
0CCF	18 D5		JR FORWARD
0CD1	D5	SUMCHK	PUSH DE
0CD2	21 6F 0D		LD HL, SUMLST
0CD5	09		ADD HL, BC
0CD6	46		LD B, (HL)
0CD7	AF		XOR A
0CD8	57		LD D, A
0CD9	C5	ADD	PUSH BC
0CDA	23		INC HL
0CDB	06 00		LD B, 0
0CDD	4E		LD C, (HL)
0CDE	D5		PUSH DE
0CDF	CD 15 0D		CALL HEXLOC
0CE2	1A		LD A, (DE)
0CE3	D1		POP DE
0CE4	82		ADD A, D
0CE5	D6 40		SUB A, 40H
0CE7	57		LD D, A
0CE8	C1		POP BC
0CE9	10 EE		DJNZ ADD
0CEB	D1		POP DE
0CEC	C1		POP BC
0CED	E1		POP HL
0CEE	FE 26		CP 26H
0CF0	28 04		JR Z, RETURN
0CF2	F1		POP AF
0CF3	77		LD (HL), A
0CF4	18 BE		JR NXTNUM
0CF6	F1	RETURN	POP AF
0CF7	18 AD		JR NXTNUM
0CF9	DF 7B	SOLN	SCAL BLINK
0CFB	18 08		JR GOBACK
0CFD	1A	REPLAC	LD A, (DE)
0CFE	CD 20 0D		CALL TABLOC
0D01	77		LD (HL), A
0D02	3E 20		LD A, 20H
0D04	12		LD (DE), A
0D05	0B	GOBACK	DEC BC
0D06	AF		XOR A
0D07	B9		CP C
0D08	28 0A		JR Z, END
0D0A	CD 15 0D		CALL HEXLOC
0D0D	1A		LD A, (DE)
0D0E	CD 20 0D		CALL TABLOC
0D11	77		LD (HL), A
0D12	18 A0		JR NXTNUM
0D14	76	END	HALT
0D15	E5	HEXLOC	PUSH HL
0D16	21 33 0D		LD HL, HEXLST-2
0D19	09		ADD HL, BC

0D1A	09		ADD HL, BC
0D1B	5E		LD E, (HL)
0D1C	23		INC HL
0D1D	56		LD D, (HL)
0D1E	E1		POP HL
0D1F	C9		RET
0D20	C5	TABLOC	PUSH BC
0D21	21 58 0B		LD HL, 0B58H
0D24	4F		LD C, A
0D25	09		ADD HL, BC
0D26	C1		POP BC
0D27	C9		RET
0D28	06 13	HEXGON	LD B, 13H
0D2A	21 35 0D		LD HL, HEXLST
0D2D	5E	LOOP	LD E, (HL)
0D2E	23		INC HL
0D2F	56		LD D, (HL)
0D30	23		INC HL
0D31	12		LD (DE), A
0D32	10 F9		DJNZ LOOP
0D34	C9		RET
0D35	DE 08 E2 08	HEXLST	
	E6 08 5C 09		
	60 09 64 09		
	68 09 DA 09		
	DE 09 E2 09		
	E6 09 EA 09		
	5C 0A 60 0A		
	64 0A 68 0A		
	DE 0A E2 0A		
	E6 0A		
0D5B	00 00 00 01	CHKLST	
	00 00 00 05		
	0A 00 00 0E		
	15 19 1E 25		
	2C 31 35 00		
0D6F	00 03 01 02	SUMLST	
	03 04 04 05		
	06 07 03 01		
	04 08 06 02		
	05 06 09 0A		
	0B 03 03 07		
	0C 04 02 05		
	09 0D 06 04		
	05 06 09 0A		
	0E 06 05 06		
	07 0A 0B 0F		
	04 02 06 0B		
	10 03 08 0D		
	11 04 04 09		
0DA9	0E 12	TITLE	DEFM /THE MAGIC HEXAGON/
	54 48 45 20		
	4D 41 47 49		
	43 20 48 45		
0DB9	58 41 47 4F		
	4E		

THE NAS-SYS MONITORS

By J. Haigh

SINGLE STEP S xxxx

The Single Step command initially uses part of the machine code used by the Execute command, described in article 2. It enters the Execute routine at the point at which it throws away the return address by POPing it into AF; it thus misses out the section which sets the workspace byte CONFLG (£0C26) to -1, and this remains at zero. Continuing with the Execute machine code routine, the Single Step command saves the specified start address in the monitor workspace, loads registers BC, DE, HL, AF and SP from the register save area in the workspace, and pushes the start address onto the top of the stack. The AF registers are then saved while bit 3 of port 0 is set; this activates a TTL circuit which sends a non-maskable interrupt to the processor after four M1 cycles. The AF registers are recovered, and this is followed by a return-from NMI instruction (RETN, ED 45), which, because the start address was pushed on the top of the stack, causes the program to start executing at this address. Three M1 cycles have now occurred (one each time a byte is fetched from memory), so as soon as the next instruction is started the NMI line is activated, and the processor is interrupted at the end of this instruction.

This causes the processor to jump to the NMI handling routine. Here bit 3 of port 0 is reset, and the value stored at CONFLG is tested. If the value is not zero the program must have arrived at this point from an Execute command, and the routine continues as described in the second article. If CONFLG is zero the top 10 bytes of the user stack, which contain the value of the program counter register for the next instruction of the program being single-stepped (pushed on the stack as the return address by the NMI) and the AF, HL, DE and BC registers, are copied to the register save area in the monitor workspace. The contents of these registers, together with the user stack pointer, the interrupt register and the index registers IX and IY, are then printed on the screen.

In Nas-Sys 1 the routine which prints the registers is part of the NMI/Breakpoint handling routine, but in Nas-Sys3 it is written as a separate subroutine which can be accessed by command P or called from other programs. The format of the register print out is also different in the two monitors. In Nas-Sys 1 only the registers are printed out, in the order:-

SP PC AF HL DE BC I IX IY

followed by a string of letters indicating which of the bits in the flag register are set. In Nas-Sys 3 the display of each of the first six register pairs is followed by the sixteen bit value held in the memory location to which the register pair points. Thus if the H

register contains £10, the L register contains £00, and memory locations £1000 and £1001 contain £22 and £33 respectively, they will appear in the register display as

1000 3322

Note that the memory bytes are printed in the order (1001), (1000). This is in line with the order in which the registers themselves are displayed, because if the contents of HL were stored at address £1000 by the instruction.

LD (£1000), HL

22 00 10

register L would be stored at £1000, register H at £1001.

After the registers have been displayed, the program returns to the monitor at the routine PARSE, where it waits for a further command input. If you enter command E or S without specifying an address, the execute routine will pick up the address stored in the workspace at £0C69, which is the value of PC saved last time around. This means that execution or single-stepping can be continued from the point where the program operation was suspended by a breakpoint or by the last single step. Once you have carried out one single step you do not need to re-enter the S command – just pressing the Newline key will produce another single step if the last command entered was S. This is particularly useful with Nas-Sys 3, which has a repeat-key routine; just holding Newline down will cause the program to single-step at a rate which can be controlled by the value stored at £0C30,£0C31

TABULATE T xxxx yyyy zz

This command prints out the hexadecimal values of the machine code stored between addresses xxxx and yyyy. The starting address (in hex) and first printed, and this is followed by eight bytes of data. A new line is then started, the updated address is printed, followed by further data bytes, and so on. The process continues until zz lines have been printed, when it pauses until a key is pressed. The routine terminates when the updated address reaches yyyy, or if 'escape' (SHIFT/NEWLINE) is pressed during a pause. Nas-Sys 1 calculates the 'checksum' of the address and data bytes on a line, and outputs this checksum. The checksum cannot be seen in the tabulation because the cursor is backspaced over the two hex digits of the checksum. If you send the tabulated data to a printer which does not backspace, the checksum will be printed. The checksum is quite useful for the direct entry of machine code as it makes it easier to spot errors. You can make your Nascom print the checksum on the screen by routing the output through a short program which suppresses the backspaces, or, if you have access to an EPROM programmer, by removing them from the monitor.

The Nas-Sys 3 tabulate command does not evaluate the checksum, but it has extra facilities for formatting the displayed data. The number of bytes of data output

per line can be controlled by a fourth argument; if this argument is nn, there will be 8+nn bytes per line. In addition to the hexadecimal data, Nas-Sys 3 outputs the ASCII or Graphics codes of the data (codes in the ranges £00 - £1F, £7F - £9F, and £FF are output as "."). A fifth argument, hhll, may be entered to suppress either the hexadecimal (if hh is not zero) or ASCII (if ll is not zero) part of the listing.

If you wish to edit a tabulated listing you must quit the Tabulate command by typing 'Escape', and then enter M to get into the Modify routine. You will now be able to move the cursor with the control keys and edit the tabulation. If you are using Nas-Sys 3 it is best to suppress ASCII part of the listing. As this will interfere with the modify command, either by producing error messages or, if the ASCII section contains a full stop, by terminating the modify routine.

USER INPUT/OUTPUT U

Input and output is accessed via pointers to tables which list the routines to be called. With the pointers, which are stored in the workspace at £0C73 (output) and £0C75 (input), set to normal values, as on power-up or after a RESET or N command, input scans the keyboard and serial port while output is sent to the screen. The U command resets the pointers so that routines provided by the user are called before the input or output is performed. The user routines can reside anywhere in memory; the start address of the input routine must be stored in the workspace at £0C7B, that of the output routine at £0C78. These locations normally contain the address of a return instruction in the monitor, so that using the U command without providing the addresses of your routines has no effect.

Although the I/O procedure also uses the remaining routines in the tables, if for any reason you do not wish these routines to be called (for example, you may wish to suppress the screen output), you merely have to set the carry flag in the user routine; the remaining routines will then be skipped. This can have unfortunate consequences – if a printer routine carries out tests which leave the carry flag set for certain characters, these characters will not appear on the screen.

VERIFY V

The address stored in the command table for the VERIFY command is the same as that for the READ command. The two commands use the same code, except that as each data byte is obtained the value stored at location £0C2B, which contains the last command letter entered, is tested to see if it is an R. If it is not, the data bytes are not stored in memory, and faulty data cannot corrupt data already in store. If you are calling the READ routine from a program you must store an R at £0C2B or data will not be loaded.

WRITE W xxxx yyyy

The write routine first switches on the cassette LED; it then waits for approximately one second, which allows the cassette recorder speed to stabilise if you are using the LED signal to control your recorder. The output table pointer is then reset to its normal value, so that output is sent only to screen. This ensures that a user routine will not interfere with the operation of the write routine. The address stored at £0C73 is saved on the stack, and restored at the end of the write routine.

After 256 nulls have been output to the serial port the data is output in blocks of 256 bytes, preceded by a null and four 'FF's, a header which gives the start address of the block, the length and number of the block, and a checksum for the header data. The start address and the length and number of the block are printed on the screen, but all other bytes are output only to the serial port; output through this port is by direct call to the serial routine, and does not use the output table and its pointer. The block of data is then output, followed by ten nulls. The purpose of all these nulls is to ensure that if several bytes of data are missed when the tape is read, the start of the next block header, marked by four 'FF's, will not be missed. If there were no nulls the READ routine would continue until it detected the correct number of bytes, accepting one or more of the 'FF's, and it would then miss the following block and only start reading again when the next block start was detected.

When all the data has been written the routine jumps to the end of the READ routine, using the same code to reset the output pointer. If you wish to make several copies of the same data, which is always advisable, you do not need to re-enter the arguments – just enter W and the previous arguments, which are still at 0C0C and 0C0E, will be used again. If you are too lazy to do even this, a simple modification to the WRITE routine will make it unnecessary. Instead of jumping to the end of READ, first execute the following code:-

21 10 0C	LD HL, £0C10	; Point HL to ARG3
35	DEC (HL)	; Decrement ARG3
C2 XX XX	JP NZ, REWRT	; Continue if non-zero
C3 YY YY	JP RDEND	; Jump to end of READ

For Nas-Sys 1 the address XXXX is £04EF; for Nas-Sys 3 it is £502. Address YYYYY is the end of the READ routine, where the table pointer is reset. If you use the modified READ routine given in the last article, you will find that there is room for extra WRITE code at the end, and the final jump can be a relative one. Incidentally, there is a misprint in the listing on page 30 of the last issue; from line 32 it should read:-

CF R2	RST RIN	; GET CHARACTER
3C	INC A	; IS IT FF?
20FA	JR NZ, R1	; IF NOT, KEEP LOOKING
-	-	-

```

10
20
30 REM
40 CLEAR 500: DIM A(12,2), TR(2,1)
50 REM
60 REM ** . . . . . Print out rules . . . . .
70 CLS: GOSUB 800: PRINT
80 PRINT "The object of the game is to move"
90 PRINT "the rings from pile A to pile B or C"
100 PRINT: PRINT "Only the top ring ";
110 PRINT "can be moved."
120 PRINT:PRINT "Larger rings cannot be ";
130 PRINT "put over smaller rings.
140 PRINT:PRINT:PRINT "PRESS ENTER WHEN READY.";
150 INPUT IN$
180 REM
190 REM** . . . . . Initialise . . . . .
200 CLS
210 FOR I = 0 TO 10
220 A(I,0) = 1:A(I,1) = 0:A(I,2) = 0
230 NEXT I
240 TR(0,0) = 1:TR(0,1) = 1
250 TR(1,0) = 11:TR(1,1) = 10
260 TR(2,0) = 11:TR(2,1) = 10:MC = 0
270 GOSUB 600
280 GOSUB 800
290 SCREEN 6,15
300 PRINT "PILE A", "PILE B", "PILE C";
310 REM
320 REM ** . . . . . Input move . . . . .
400 GOSUB 920: SCREEN 2,2: PRINT "MOVE FROM ";
410 INPUT N$ 420 GOSUB 1300:TF = IN:IF TF < 0 THEN 400
430 IF A(10,TF) <> 0 THEN 470
440 SCREEN 1,1
450 PRINT "NO RINGS ON THAT STICK CHUM"
460 GOTO 400
470 GOSUB 920:SCREEN 2,2:PRINT "TO PILE";
480 INPUT IN$
490 GOSUB 1300:TT = IN:IF TT < 0 THEN GOTO 470
500 GOSUB 1000
510 GOTO 400
580 REM
590 REM ** . . . . . Initialise graphics . . . . .
600 CLS: IT = 0: IP = 14:GOSUB 630
610 IT = 1:IP = 42: GOSUB 630
620 IT = 2:IP = 70: GOSUB 630: GOSUB 800
630 FOR I = 0 TO 32
640 FOR J = 0 TO A(I/3,IT)
650 SET (J + IP, I+9)
660 SET (IP -J, I+9)
670 NEXT J
680 NEXT I:RETURN
780 REM
790 REM ** . . . . . Print title . . . . .
800 TL$ = "TOWERS OF HANOI MOVE "+STR$(MC)
810 FOR I = 1 TO LEN(TL$)
820 POKE 3029+I,ASC(MID$(TL$,I,1))
830 NEXT I
840 RETURN

```

```

880 REM
890 REM ** . . . . . Clear line subroutine . . . . .
900 SCREEN 1,1:GOSUB 930
910 SCREEN 3,1:GOSUB 930
920 SCREEN 2,2:GOSUB 930:RETURN
930 FOR I = 1 TO 4: PRINT "          ";;NEXT I
940 RETURN
945 REM
950 REM ** . . . . . Move a ring subroutine . . . . .
1000 IF TR(TT,1) = 0 THEN 1030
1010 IF TR(TF,1) > TR(TT,1) THEN 1150
1020 IF TF = TT THEN 1130
1030 MC = MC+1: GOSUB 800
1040 A(TR(TT,0)-1,TT) = A(TR(TF,0),TF)
1050 A(TR(TF,0),TF) = 0
1060 TR(TT,1) = TR(TF,1)
1070 TR(TT,0) = TR(TT,0) -1
1080 TR(TF,0) = TR(TF,0) + 1
1090 TR(TF,1) = A(TR(TF,0),TF)
1100 IF A(10,0) + A(10,1) = 0 THEN 1180
1110 IF A(10,0) + A(10,2) = 0 THEN 1180
1120 GOSUB 1400:RETURN
1130 SCREEN1,1:PRINT "DON'T BE SILLY":RETURN
1150 SCREEN1,1:PRINT "YOU CANNOT PUT LARGER";
1160 PRINT " RINGS OVER SMALLER ONES!":RETURN
1180 PRINT "CONGRATULATIONS, YOU HAVE DONE IT"
1190 PRINT "          OPTIMUM 1023 ";
1200 PRINT "YOU RATING IS ";102300/MC;"%"
1210 PRINT "          DO YOU WANT ANOTHER GO (Y/N)?";
1220 INPUT IN$
1230 IF LEFT$(IN$,1) = "N" THEN END
1240 IF LEFT$(IN$,1) = "Y" THEN GOTO 40
1250 GOTO 1220
1260 REM
1270 REM ** . . . . . Convert key to number . . . . .
1300 IF IN$ = "A" THEN IN=0:RETURN
1310 IF IN$ = "B" THEN IN=1:RETURN
1320 IF IN$ = "C" THEN IN=2:RETURN
1330 IN = -1000:RETURN
1340 REM
1350 REM ** . . . . . Move ring graphic sub . . . . .
1400 ZZ = TF:GOSUB 1420: ZZ = TT
1420 IF ZZ = 0 THEN IX = 14
1430 IF ZZ = 1 THEN IX = 42
1440 IF ZZ = 2 THEN IX = 70
1450 FOR JX = TR(ZZ,0)*3 TO TR(ZZ,0)*3+2
1460 FOR J = 1 TO A(TR(TT,0),TT)
1470 IF ZZ = TT THEN 1510
1480 RESET (J + IX,JX+6)
1490 RESET (IX-J,JX+6)
1500 GOTO 1530
1510 SET(J+IX,JX+9)
1520 SET(IX-J,JX+9)
1530 NEXT J
1540 NEXT JX
1550 GOTO 900

```



NASCOM 1 & 2

Nasprint 80

Nasprint 80 is a 2K program which greatly extends and simplifies the operation of Nas-Pen. New functions supplied by Nasprint 80 includes:

Pagination

Output a page number of each page

Output a title on each page

Centre title

Text formatting with embedded control codes. e.g. Change line length; change line spacing; change margins; centre line between margins; new page; output control codes to printer.

The program contains a parallel printer routine for a Centronics type interface, specifically designed for the Epsom MX-80, but the program can be used with any printer, parallel or serial, as the output is routed through an address in RAM.

The program also facilitates the operation of a printer with Zeap, Nas-Dis, De-bug, Nas-Sys & ROM Basic; the software/firmware being used is selected from a menu and Nasprint 80 then changes the necessary addresses to produce a hard copy output.

The program is supplied in 2x2708's for fitting 2716's in the RAM A card. £14.95

New Fase (16K/MC/G)

New version of the space invaders type with each new fleet of invaders having a different shape & kind of motion. Missiles fired at you come straight down or diagonally left to right & vice versa.

Destroy one 'fase' & move onto the next. The fuel level is shown graphically and you can refuel if you obliterate four fleets. Your score is shown at the end of a game and the top ten scorers are ranked. Once again the difficulty level has been set very high. £7.95

Starship Command (16K/B/G)

The 'real-time' Space Adventure for 'thinking' campaigners!

You command the sole fighting ship of a small league of planets who are pledged to resist the oppression of the powerful Terran Federation.

The 3-dimensional planetary system is divided into 729 sectors (9x9x9), your viewscreen revealing neighbouring sectors 5 wide by 3 high by 3 deep. It can be rotated to look up & down as well as N,S,E & W.

You will encounter friendly, neutral & hostile planets and, of course, enemy interceptors. Your long term objective is to raise the morale of the system's inhabitants so as to bring forth a spontaneous rebellion against the Federation. This can be achieved progressively by winning in combat and converting neutral planets. The opposite occurs if you flee from a fight, upset neutral planets or just skulk!

Machine-code sub-routines ensure the clashes with the enemy are exciting. There are six levels of skill and many other features. Full instructions are given in a separate program. £9.95

Moon Raider (MC/G)

The 'Scramble' game you have been waiting for!! Blast the asteroids, enemy missiles & ramships out of the sky as you skim over the mountains on the moon's surface. Bomb the fuel dumps and enemy defences. Higher points scored for hits closer to the ground. Maximise your total score on restricted supplies of fuel. If you survive the first part of the game you enter the 'tunnel', with rocky projections above & below you! Four skill levels, excellent graphics & excruciating sound via the keyboard port. £8.95

*** NASCOM 1 - Cottis Blandford cassette interface for N2 format, reliability & fast load £14.90
- 8K RAM required unless otherwise stated
- Please state if Nascom TAPE Basic required.
ALL PROGRAMS SUPPLIED ON CASSETTE IN CUTS/KANSAS CITY FORMAT



Please add 55p/order P & P + VAT @ 15%.
Large (15½p) Sae for FULL CATALOGUE.

PROGRAM POWER
5, Wensley Road
Leeds LS7 2LX. +



